
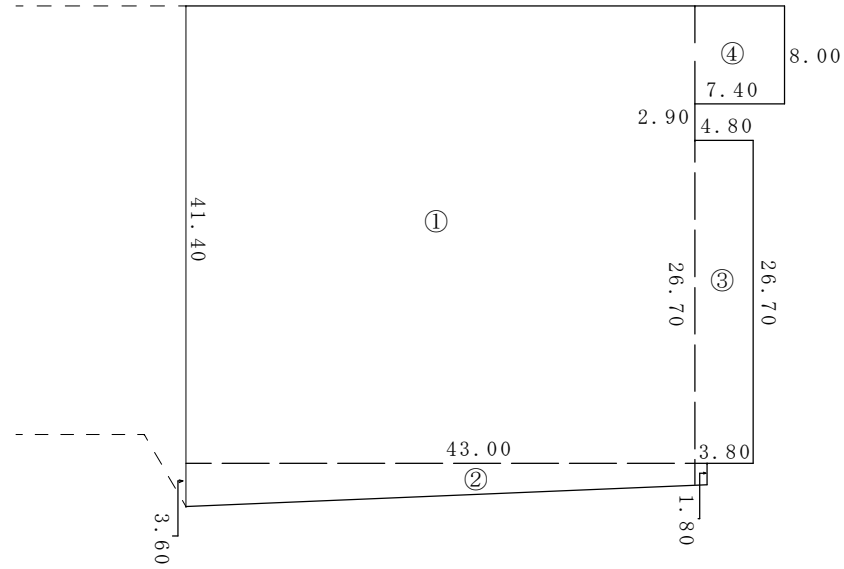


# 庁舎南側駐車場舗装整備

舗装展開図  
1/500



## 駐車場面積

①	41.40 × 43.00	1780.20
②	$(1.80 + 3.60) / 2 \times 43.00$	116.10
③	$26.70 \times (4.80 + 3.80) / 2$	114.81
④	7.40 × 8.00	59.20
合計		2070.31

## 舗装版破碎・舗装数量 (AS)

$$2070.31 - 43.87 = 2026.44 \text{ m}^2$$

## 殻運搬

$$2026.44 \times 0.05 = 101.32 \text{ m}^3$$

## 舗装版切断

$$50.40 + 8.00 + 41.40 + 3.60 = 103.40 \text{ m}$$

## 舗装控除各数量

### 円形花壇

$$(3.05 \times 3.05 \times \pi) \times 1.00 = 29.22 \text{ m}^2$$

### 小側溝 W=0.26m

$$(18.90 + 31.10 + 6.35) \times 0.26 = 14.65 \text{ m}^2$$

## 合計

$$29.22 + 14.65 = \underline{43.87 \text{ m}^2}$$